

# Alfa Laval CH 600

## Modularized disc stack separation system for industrial use

### Introduction

The use of separators in different chemical applications goes back to the beginning of the 1900s. Based on the long-term cooperation with various chemical industries, Alfa Laval separators are specially designed for the requirements and demands of this industry.

### Application

CH 600 separator is designed and optimized for:

- Petrochemical
- Minerals
- Pulp and paper
- Green chemical applications
- Pharmaceuticals

### Benefits

- High separation efficiency
- Small footprint – easy to install and start up
- Low power consumption
- Complete system handling both process and utility requirements
- Flexible installation possibilities
- Robust and reliable design

### Design

The system consists of a 17-size separator, a process valve module with valves and components for routing of product and a service liquid module for utilities, in and out from the separator, as well as control and starter cabinet.

All metallic parts in contact with the process liquid are made of stainless steel. Gaskets and seals in contact with the product are made of various materials to fit the process needs.

The separation system is prepared for completely automated Cleaning in Place (CIP).

Available in following executions:

- Solid-liquid separation
- Liquid-liquid separation
- Liquid-liquid-solid separation

Available for installation in safe area, zone 2 and zone 1.



### Scope of supply

- Disc stack separator with process and service liquid units
- Main process valves of type ball valve
- Instrumentation for pressure monitoring
- Manual flow regulating valve
- Manual pressure regulator valve
- Automatic backpressure valve
- Flow indication transmitter of volumetric type
- Main motor starter with VFD
- Control panel with PLC and HMI

### Options


- Commissioning (on-site or re-remote assisted)
- Service agreement
- Solids receiving unit: Consists of a collection device and a pump, to pump away discharged solids (mandatory for zone 1 installation, option for safe area and Zone 2 installations)
- Factory Acceptance Test
- UL or CSA versions available on request

### Working principle

The product enters and leaves the separator via the valve module. The flow rate and the counter pressure in the outlet of the separator are controlled by the process and service liquid module.

Discharge of solids from the separator bowl is triggered either by a timer or a manual control. The discharged solids are pumped away by the optional solids receiving unit.

The valve module also controls the utility liquids for the separator's discharge system and for flushing and CIP as well as an inert gas system for installation in zone 1.

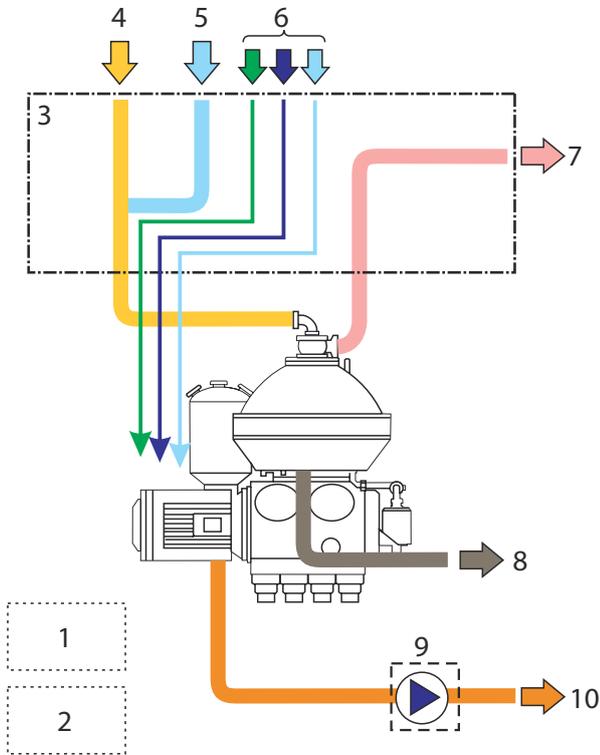

1. Control cabinet
2. Main motor starter and VFD
3. Process and service liquid module
4. Product inlet
5. Standby/Safety water
6. Utilities
7. Outlet(s) of product(s)
8. Drain for separator
9. Solids receiving unit
10. Outlet of discharged solids

### Technical data

Performance data	
Hydraulic capacity <sup>1</sup>	50 000 l/h (220.1 US gpm)
Maximum motor power	37 kW (49.6 HP)

1

3" ASME B16.5  
Flange

Actual capacities depend on operating conditions

### Connections

Inlet	2" ASME B16.5 Flange
Outlet	2" ASME B16.5 Flange



### Material data

Piping	ASME B36.19M, Schedule 10s AISI 316L
Customer connection	ANSI B16.5 Flange
Gaskets in system	PTFE / Graphite product wetted parts
Pipe frame	AISI 304

### Weights data (approximate)

System weight incl. bowl and motor	3190 kg (7032 lbs)
Bowl weight	808 kg (1781 lbs)

### Dimensional drawing

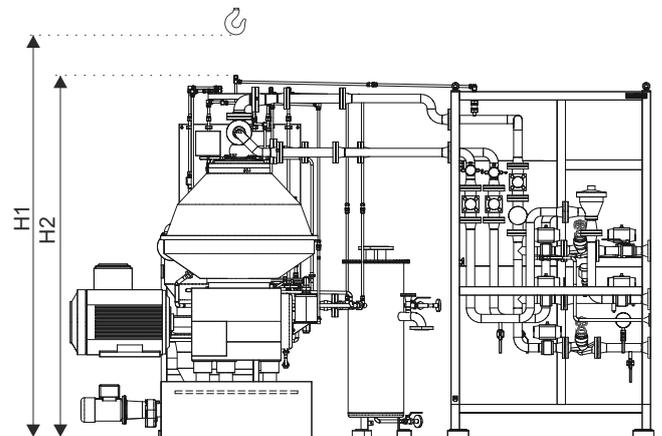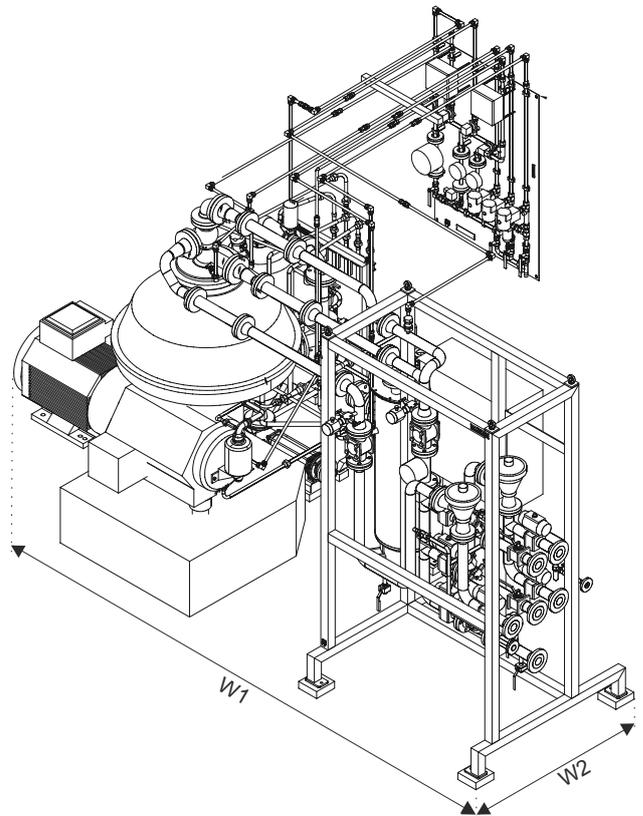

### Dimensions

H1 (min. lifting height)	3060 mm (10 ft 1/2 inch)
H2	2835 mm (9 ft 1/2 inch)
W1	4855 mm (15 ft 11 inch)
W2	2675 mm (8 ft 9 inch)

This document and its contents are subject to copyrights and other intellectual property rights owned by Alfa Laval Corporate AB. No part of this document may be copied, re-produced or transmitted in any form or by any means, or for any purpose, without Alfa Laval Corporate AB's prior express written permission. Information and services provided in this document are made as a benefit and service to the user, and no representations or warranties are made about the accuracy or suitability of this information and these services for any purpose. All rights are reserved.

200000594-2-EN-GB

© Alfa Laval Corporate AB

---

**How to contact Alfa Laval**

Up-to-date Alfa Laval contact details for all countries are always available on our website at [www.alfalaval.com](http://www.alfalaval.com)